

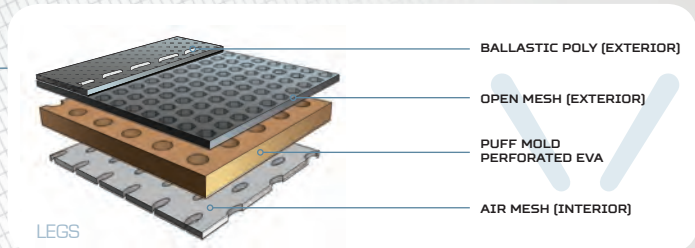


FLOWTECH® LTE

LIGHTWEIGHT BREATHABILITY FOR
UNSURPASSED PERFORMANCE

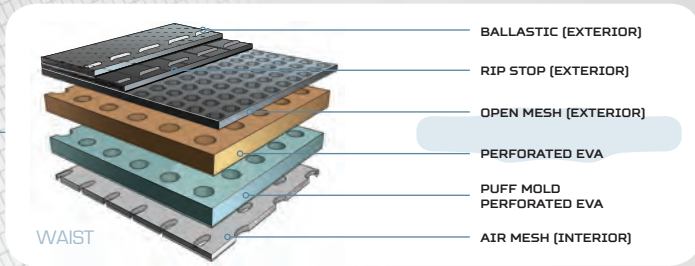

Heat and Moisture Transferal Padding

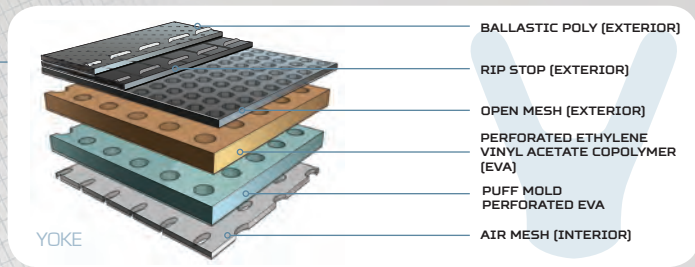

FlowTech LTE... Designed for breathable performance

Lightweight

- Aluminum hardware employed to reduce weight and increase productivity.
- Proprietary FlowScope padding delivers an overall cooler wearing harness.

Breathable

- FlowScope® padding features a breathable, open-cell foam with hundreds of vented openings in the Shoulder, Waist and Leg pads maximize airflow reducing heat and moisture buildup.
- Moisture wicking air mesh linings move moisture away from the body to keep you cool during hot days.
- FlowTech LTE padding features air flow channels for maximum circulation of air and heat escape.

MATERIALS SPECIFICATIONS	
Webbing:	Polyester; 5,000 lbs. Min. Tensile Strength
D-Rings:	Aluminum Alloy and Alloy Steel; 5,000 lbs. Min. Tensile Strength
Buckles/ Adjusters:	Aluminum Alloy and Alloy Steel; 3,375 lbs. Min. Tensile Strength

PERFORMANCE SPECIFICATIONS	
Static Strength:	3,600 lbs. Minimum
ANSI User Capacity:	130 to 310 lbs. Max.
OSHA User Capacity:	130 to 425 lbs. Max.

RELEVANT STANDARDS	
ANSI:	Z359.11-2014
OSHA:	1926.502 and 1910.66

FLOWTECH **LTE**

Lightweight Breathability for Unsurpassed Performance



- 1 Flowscape® ventilated breathable padding throughout shoulder yoke and waist pads
- 2 Proprietary Aluminum CamLock Torso Adjusters
- 3 Visi-Lock Quick Connect Chest Buckles
- 4 Anodized Aluminum Alloy D-rings
- 5 Integrated Tool Lanyard Attachment Rings**
- 6 Full-length 18" Contoured Leg Pads
- 7 Twin Lanyard Parking Elements
- 8 Exclusive Dorsal D-ring Keeper with integrated SRD attachment sleeve



** Tool Lanyard Connection Rings available on Construction Belted harnesses only.

Flowscape ventilated padding pushes heat out while drawing cool air in.



Optional Locking QC Leg Buckles and Suspension Trauma Relief System available on select FlowTech harnesses.



FLOWTECH **LTE**

Lightweight Breathability for Unsurpassed Performance



7086BR



7093B



7087BQ



7092B

Standard Non-Belted Harnesses for Fall Arrest and Work Positioning

PART#	SIZES*	D-RING	LEG ADJUST BUCKLES	CHEST CLOSURE
7086B	S, M, L, XL	Dorsal	Tongue Buckle	Quick Connect
7086BR*	S, M, L, XL	Dorsal	Tongue Buckle	Quick Connect
7087B	S, M, L, XL	Dorsal	Quick Connect	Quick Connect
7087BQ	S, M, L, XL	Dorsal	Locking Quick Connect	Quick Connect
7092B	S, M, L, XL	Dorsal, Hip	Quick Connect	Quick Connect
7093B	S, M, L, XL	Dorsal, Hip	Tongue Buckle	Quick Connect

* 7086BR includes Suspension Trauma Relief System

FLOWTECH **LTE**

Lightweight Breathability for Unsurpassed Performance



7088B



7099B



7089BQ



8099B

Construction Belted Harnesses for Fall Arrest and Work Positioning

PART#	SIZES*	D-RING	LEG ADJUST BUCKLES	CHEST CLOSURE
7088B	S, M, L, XL, 2X, 3X	Dorsal, Hip	Tongue Buckle	Quick Connect
7088BR*	S, M, L, XL	Dorsal, Hip	Tongue Buckle	Quick Connect
7089B	S, M, L, XL, 2X, 3X	Dorsal, Hip	Quick Connect	Quick Connect
7089BQ	S, M, L, XL	Dorsal, Hip	Locking Quick Connect	Quick Connect
7099B	S, M, L, XL	Dorsal	Tongue Buckle	Quick Connect
8099B	S, M, L, XL	Dorsal	Quick Connect	Quick Connect

* 7088BR includes Suspension Trauma Relief System

FLOWTECH **LTE**

Lightweight Breathability for Unsurpassed Performance



7086BFD



7087BFD



7088BFD



7089BFD

Construction and Non-Belted Harnesses for Climbing, Fall Arrest and Work Positioning

PART#	SIZES*	D-RING	LEG ADJUST BUCKLES	CHEST CLOSURE
7086BFD	S, M, L, XL	Dorsal, Sternal	Tongue Buckle	Quick Connect
7087BFD	S, M, L, XL	Dorsal, Sternal	Quick Connect	Quick Connect
7088BFD	S, M, L, XL	Dorsal, Hip, Sternal	Tongue Buckle	Quick Connect
7089BFD	S, M, L, XL	Dorsal, Hip, Sternal	Quick Connect	Quick Connect

All Climbing Harnesses only meet OSHA Regulations