





PRODUCT SPECIFICATIONS

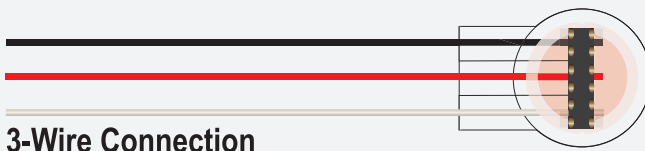

PRODUCT DIAGRAM - TYPICAL 2 AND 3 WIRE CONNECTIONS

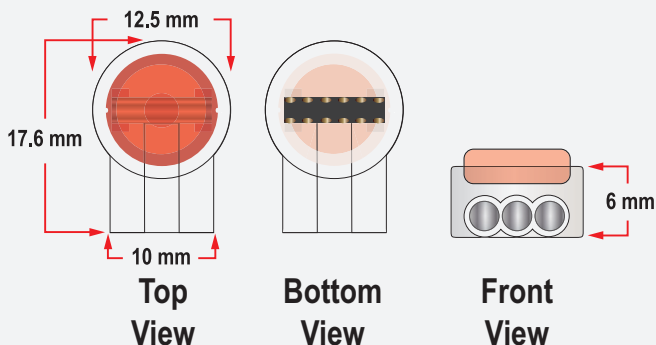

AT-A-GLANCE

DESCRIPTION	UR2 Splice Connector
MATERIAL	Non-toxic polypropylene
PACKAGING	100 pcs / box
DIMENSIONS	17.6 mm x 12.5 mm x 6 mm
COLOR	Red lid, clear transparent body

VERICOM® UR2 Splice Connector

This red-lid UR2 splice connector is gel-filled to protect against corrosion damage caused by moisture.

FEATURES & BENEFITS

- Conductors: Accepts 2 or 3 solid copper or copper-clad steel conductors
- Conductor Size: Accommodates 26AWG to 19AWG
- Moisture-resistant compound protects connection and resists corrosion
- Suitable for splicing applications
- Material: non-toxic polypropylene
- Maximum Insulation: 2mm (0.08in) diameter
- Wire Size: Accommodates 26 to 19 AWG size conductors
- Color: Red lid, clear transparent body
- Operating temperature range: -30°C to 70°C and humidity range of 0% to 95%.

PART NUMBER

WCRL-04552

NOTE: TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Rev.20160627.3